


# SW7ML / SW8S / SW6MLXF

The SW7ML PREWIRED BOX CAN BE CONFIGURED IN 2 MORE WAYS

---

## SW8S-MF Spur Box – Connections

Connect the light / power cable to the Power In / Power Out connection – Loop a single core from the switch L live to the switch live – This will give 8 direct power outputs for downlights or power.

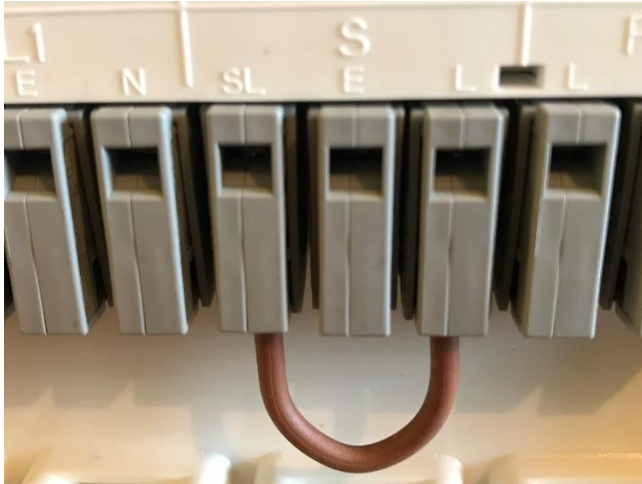


---

SW6MLXF - 1 Switch Connection and up to 6 downlights + Connection for an extractor fan with timer.

Connect the Power In / Out on the switch side – Using 3 core & earth connect the fan switch Live to L4 L – Live and the neutral / earth to the L4 – connect the permanent live to the L connection on the power out. There will then only be 6 outputs for downlighters.

If you require to continue the radial circuit on the Power / Out next to L4 – Using a 3 pole maintenance free connector – loop a single core from the L Live on the P I/O – Connect the Permanent Live from the Extractor Fan in the middle connection and then the L live power out in the final connection point.

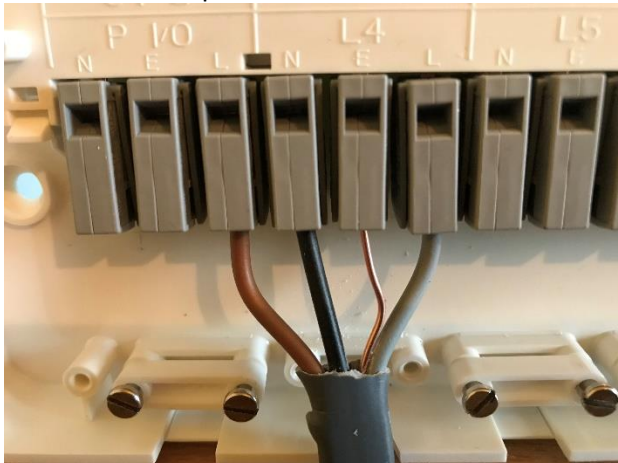

If assistance is required please call Surewire Ltd on mobile 07787717497